



Sample image






## Datasheet

**Article number:** 70010041

**Designation:** KG32.T203/40.KL51V

**Description:** Switch Global Disconnecter

<b>IEC 60947-3 EN 60947-3, VDE 0660 Teil 107</b>						
<b>Rated insulation voltage Ui</b>						
Voltage (V) AC / DC						
690 AC						
<b>Rated uninterrupted current Iu/Ith</b>						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)		additional requirements		
32	50			55 Ambient temperature +50°C during 24 hours with peaks up to +55°C		
<b>Rated operational current Ie</b>						
Utilization category						
AC-32A						
Voltage (V)						
20 - 400						
Current (A)						
32						
<b>Rated operational power</b>						
Utilization category						
Voltage (V)						
No. of phases						
No. of poles						
Power (kW)						
AC-3	220 - 240	3		3		5,50
AC-3	380 - 440	3		3		7,50
AC-3	660 - 690	3		3		7,50
AC-23A	220 - 240	3		3		5,50
AC-23A	380 - 440	3		3		11
AC-23A	660 - 690	3		3		11
<b>Max. Fuse rating IEC</b>						
Fuse characteristic						
gG						
No. of Fuses						
1						
Current (A)						
35						
<b>UL60947-4-1, UL508</b>						
<b>Nominal Voltage</b>						
Voltage (V) AC / DC						
600 AC						
<b>Rated insulation voltage Ui</b>						
Voltage (V) AC / DC						
600 AC						
<b>Rated thermal current</b>						
Current (A)						
30						
Ambient temperature (°C)						
0 - 40 -						
<b>Horsepower rating</b>						
Across-the-Line Motor Starting						
	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 120	1	2	1,50	40	
DOL	200 - 208	1	2	3	40	
DOL	220 - 240	1	2	5	40	
DOL	277 - 277	1	2	5	40	
DOL	415 - 415	1	2	5	40	
DOL	440 - 480	1	2	7,50	40	
DOL	550 - 600	1	2	7,50	40	
DOL	110 - 120	3	3	3	40	
DOL	200 - 240	3	3	10	40	
DOL	415 - 415	3	3	10	40	
DOL	440 - 480	3	3	20	40	
DOL	550 - 600	3	3	25	40	
<b>Pilot duty rating code</b>						
Duty Code						
A600						
<b>SCCR / Max. fuse rating</b>						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.						
<b>Temp. rating of wire</b>						
Temperature rating (°C)						
60 - 75						
Current (A) Text						
-- --						
<b>General Use</b>						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	30	1	1	1	
AC	600	30	1	2	1	
AC	600	30	3	3	1	

General Information					
Text					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.					
CSA					
Nominal Voltage					
		Voltage (V) AC / DC			
		600 AC			
Rated insulation voltage Ui					
		Voltage (V) AC / DC			
		600 AC			
Rated thermal current					
		Current (A)	Ambient temperature (°C)		Additional Text
		30	0 - 40		-
Horsepower rating					
Across-the-Line Motor Starting					
	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	1,50	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	5	40
DOL	415 - 415	1	2	5	40
DOL	440 - 480	1	2	7,50	40
DOL	550 - 600	1	2	7,50	40
DOL	110 - 120	3	3	3	40
DOL	220 - 240	3	3	10	40
DOL	415 - 415	3	3	10	40
DOL	440 - 480	3	3	20	40
DOL	550 - 600	3	3	25	40
Pilot duty rating code					
Duty Code					
A600					
Temp. rating of wire					
		Temperature rating (°C)	Current (A)		Text
		75	--		--
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	30	1	1	1
AC	600	30	1	2	1
AC	600	30	3	3	1
GENERAL TECHNICAL INFORMATION					
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm <sup>2</sup> ) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1		0.75mm <sup>2</sup>	Copper
Solid wire	Min.	2		0.5mm <sup>2</sup>	Copper
Flexible wire	Min.	2		0.75mm <sup>2</sup>	Copper
Flexible wire	Max.	1		AWG 10	Copper
Flexible wire	Max.	1		4mm <sup>2</sup>	Copper
Flexible wire	Min.	1		1.5mm <sup>2</sup>	Copper
Single-core or stranded wire	Max.	1		6mm <sup>2</sup>	Copper
Single-core or stranded wire	Max.	1		AWG 10	Copper
Flexible wire with sleeve	Max.	1		4mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1		0.75mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2		0.5mm <sup>2</sup>	Copper
Stripping length					
Length (mm) --					
					
Recommended screw driver					
Type of screw driver		Value			
Cross Screwdriver		PH2			
Slot screwdriver according to DIN 5264		0,8x4			
Tightening torque of screws					
		tightening torque (Nm)		tightening torque (lb-in)	
		1,25		11	
Approbations					
Specification					Marking
CE marking					
UK Directives					
CSA C.22.2 No.14					
GB/T14048.3					

## General Information

### Text

- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.
- EMC Note: This device is suitable for use in environment A and B.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Het gebruik van een extra apparaat kan de beschermingsklasse van de gekozen bouwvorm beïnvloeden.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

## Waste Electrical & Electronic Equipment (WEEE)

### Picture name

### Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at [www.krausnaimer.com](http://www.krausnaimer.com)

## Proposition 65

### Picture name

### Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


## Mounting-KL51V

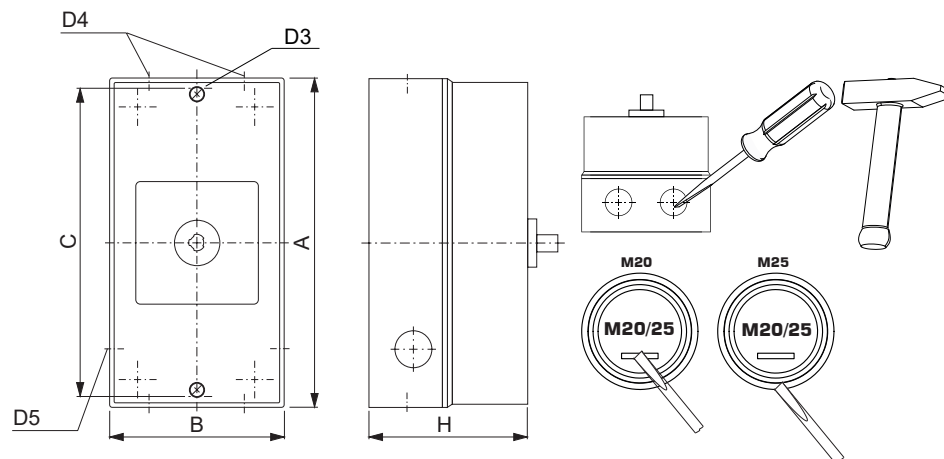


IP - Code front side	IP66, IP67, IP69k
Stages	1,00 - 5,00
A	H 160,00 mm
B	H 85,00 mm
C	H 150,00 mm
D3	∅ 4,20 mm
D4	∅ 4,00 x M20/M25
D5	∅ 2,00 x M20
H	H 82,00 mm

**Wiring diagram**

KG32.T303.KL51V

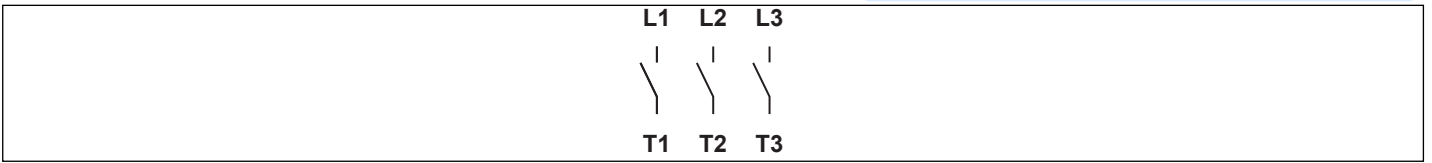



**Switch program**  
KG32.T303.KL51V



**KG32**     **T303**


**Page 1 of 1**

Face Plate		L1	L2	L3					
		1	3	5	7	9	11	13	15
									
Switching Angle	90	2	4	6	8	10	12	14	16
Total switching Angle	90	T1	T2	T3					
0	<b>270</b>								
1	0	<b>█</b>	<b>█</b>	<b>█</b>					
	90								
	180								

Version: 102

**Face plate**

S1.F656/E10.V9

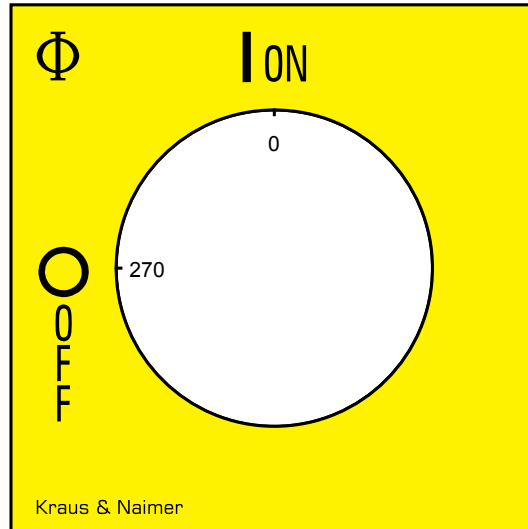

## HANDLES

**Designation:** S1B.G842

**Handle colour:** "2" red

### GENERAL TECHNICAL INFORMATION

#### Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x5,5

## AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B


**Designation:** K0.M510A/2CA-B

**Number of contacts:** "2" 2 auxiliary contacts

**Operation of contacts:** "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

**Type of version:** "A" 1. auxiliary contact module

**Type of mounting:** "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
<b>Nominal Voltage</b>				
		Voltage (V) AC / DC		
		440 AC		
<b>Rated uninterrupted current Iu/Ith</b>				
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
10	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C	
<b>Rated operational current Ie</b>				
Utilization category			Voltage (V)	Current (A)
AC-15			110 - 240	2,50
AC-15			380 - 440	1,50
AC-21A			440	10
<b>UL60947-4-1, UL508</b>				
<b>Rated thermal current</b>				
		Current (A)	Ambient temperature (°C)	Additional Text
		10	0 - 40	-
<b>GENERAL TECHNICAL INFORMATION</b>				
<b>Size of conductor</b>				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm <sup>2</sup> ) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1	0.5mm <sup>2</sup>	Copper
Solid wire	Min.	2	0.5mm <sup>2</sup>	Copper
Flexible wire	Min.	1	0.75mm <sup>2</sup>	Copper
Flexible wire	Min.	2	0.75mm <sup>2</sup>	Copper
Flexible wire	Max.	2	AWG 16	Copper
Flexible wire	Max.	2	1.5mm <sup>2</sup>	Copper
Single-core or stranded wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	1.5mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	1mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm <sup>2</sup>	Copper
<b>Stripping length</b>				
Length (mm) --				
				
<b>Recommended screw driver</b>				
Type of screw driver	Value			
Cross Screwdriver	PH1			
Slot screwdriver according to DIN 5264	0,6x3,5			
<b>Tightening torque of screws</b>				
		tightening torque (Nm)	tightening torque (lb-in)	
		0,40	3,50	
<b>Conditions during transport and storing</b>				
		Minimum temperature (°C)	Maximum temperature (°C)	additional requirements
		-40	85	In case of temperatures below -5°C no shock load permissible
<b>General information</b>				
Text				
<ul style="list-style-type: none"> <li>- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.</li> <li>- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.</li> <li>- After wiring, ALL terminal screws must be tightened to the specified torque values.</li> <li>- Do not lubricate or treat contacts.</li> <li>- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.</li> </ul>				
Classification Terminal: Screw terminal				



13	21
	
14	22