



Sample image

Datasheet

Article number: 70017532

Designation: KG125.T206/88.STM

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
1000 50/60Hz						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
125	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category		Voltage (V)		Current (A)		
AC-32A		20 - 400		125		
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	22		
AC-3	380 - 440	3	3	37		
AC-3	660 - 690	3	3	30		
AC-23A	220 - 240	3	3	30		
AC-23A	380 - 440	3	3	45		
AC-23A	660 - 690	3	3	37		
Max. Fuse rating IEC						
Fuse characteristic		No. of Fuses		Current (A)		
gG		1		125		
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
150		0 - 40 ON-OFF switch (Valid when connected with wire rated for 75°C)				
125		Change over switch (Valid when connected with wire rated for 0 - 40 75°C)				
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	7,50	40
DOL		220 - 240	1	2	20	40
DOL		277 - 277	1	2	20	40
DOL		440 - 480	1	2	35	40
DOL		550 - 600	1	2	35	40
DOL		110 - 120	3	3	15	40
DOL		220 - 240	3	3	30	40
DOL		440 - 480	3	3	60	40
DOL		550 - 600	3	3	60	40
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 300A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)		Current (A) Text				
75		-- --				
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	125	1	1	1	
AC	277	150	1	1	1	
AC	600	150	1	2	1	
AC	600	150	3	3	1	
AC double-throw function	600	125	1	2	1	
AC double-throw function	600	125	3	3	1	

General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
CSA						
Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			600 AC			
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		150	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	7,50	40
DOL		220 - 240	1	2	20	40
DOL		277 - 277	1	2	20	40
DOL		440 - 480	1	2	35	40
DOL		550 - 600	1	2	35	40
DOL		110 - 120	3	3	15	40
DOL		220 - 240	3	3	30	40
DOL		440 - 480	3	3	60	40
DOL		550 - 600	3	3	60	40
Temp. rating of wire						
		Temperature rating (°C)	Current (A)		Text	
		75	--		--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	150	1	1	1	
AC	600	150	1	2	1	
AC	600	150	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire
Solid wire	Min.	1		6mm²		Copper
Flexible wire	Max.	1		70mm²		Copper
Flexible wire	Min.	1		16mm²		Copper
Flexible wire	Max.	1		AWG 2/0		Copper
Single-core or stranded wire	Max.	1		95mm²		Copper
Single-core or stranded wire	Max.	1		AWG 3/0		Copper
Flexible wire with sleeve	Max.	1		70mm²		Copper
Flexible wire with ferrule according to DIN 46228	Min.	1		10mm²		Copper
Stripping length						
						Length (mm) --
						
Recommended screw driver						
Type of screw driver		Value				
Hex key		5				
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			14		125	
Approbations						
Specification					Marking	
CE marking						
UK Directives						
UL 60947-4-1; CSA C22.2 No. 60947-4-1						
CSA C.22.2 No.14						
GB/T14048.3						
General Information						
Text						
- Use solo alambres de cobre con o sin alambres individuales chapados en estaño/plata. No se permite el estañado posterior de los extremos del conductor.						
- EMC Note: This device is suitable for use in environment A and B.						
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.						
- After wiring, ALL terminal screws must be tightened to the specified torque values.						

General Information

Text

- La clase de protección del tipo de montaje seleccionado puede variar si se utilizan extras opcionales.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE

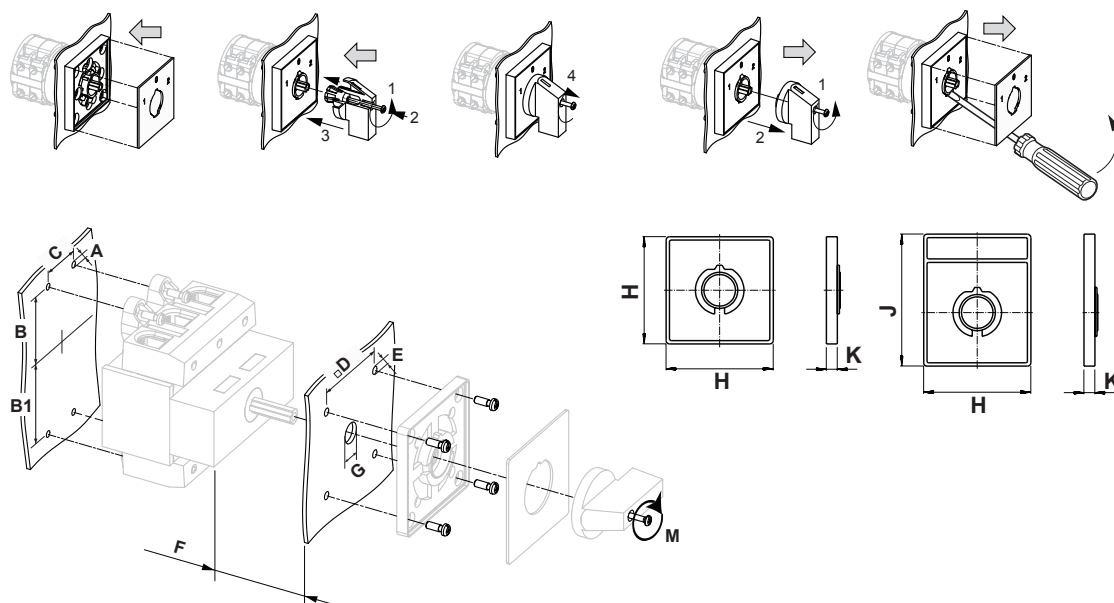


IP - Code front side	IP40
Stages	6,00 - 12,00
A	Ø 6,40 mm
B	H 59,00 - 61,00 mm
B1	H 59,00 - 61,00 mm
C	H 76,00 mm
D	□ 68,00 mm
E	Ø 6,00 mm
F	H ≤ 16,00 mm
G	Ø 13,00 - 17,00 mm
H	H 88,00 mm
J	H 124,00 mm
K	H 8,50 mm
M	↺ 1,20 Nm

Las placas de montaje frontal deben instalarse con tornillos de cabeza cilíndrica M5 x 25 mm o tornillos de cabeza ovalada, arandelas y tuercas. Tenga en cuenta que estos componentes no están incluidos en el alcance de la entrega.

Wiring diagram


KG125.T306.VE

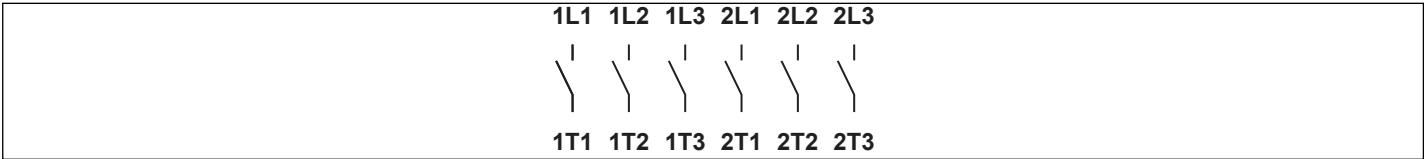

Version: 117

Face plate

S2.F456/C10.V11

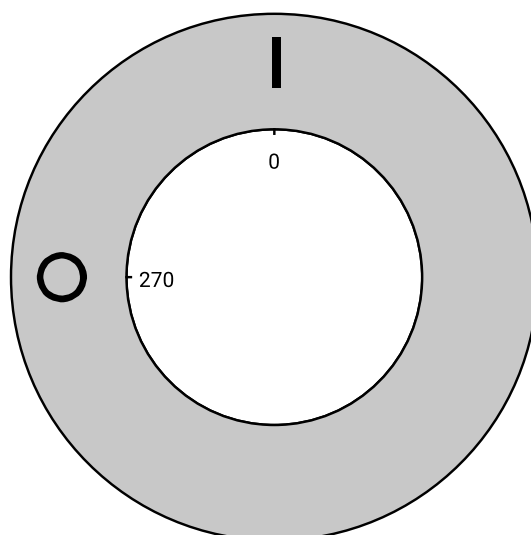



Sample image


PADLOCK DEVICE

with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)

Designation: S2.V840D/D6

Color of F-handle ring: "D" red


Color of face ring: "6" yellow

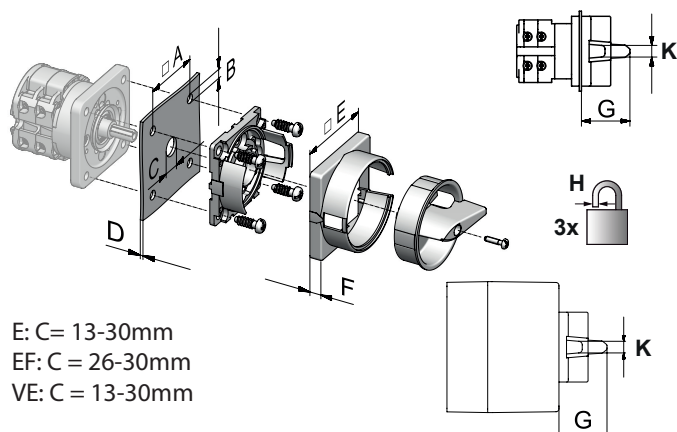

S2D.V840.10

Cuando se usa con M280D, M280E o M280F, la pieza S2D.V840.10 no es necesaria.

A	□	68,00 mm	B	H	6,00 mm	D	H	5,50 mm
E	□	88,00 mm	F	H	9,00 mm	G	H	48,50 mm
H	∅	7,00 - 8,50 mm	K	H	10,00 mm			



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)

Designation: S2.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch

Shaft length: "1" 60 - 90 mm

Application: "S" for type of mounting VE


Type of version: "-EF" splash proof (IP66/67)




YouTube




youtube.com
/watch?v=9AmLH1rVVdo

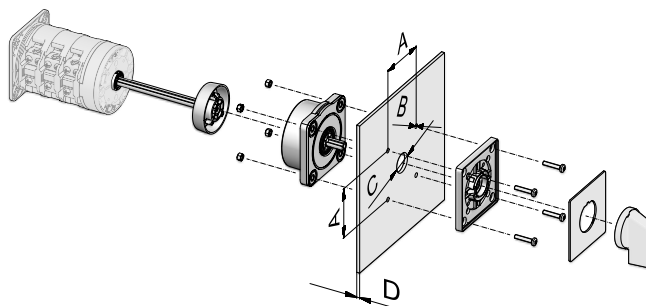

A	□	68,00 mm	B	∅	6,00 mm	C	∅	26,00 - 30,00 mm
D	H	5,50 mm						




Z	H	>= 110,00 mm		
---	---	--------------	--	--

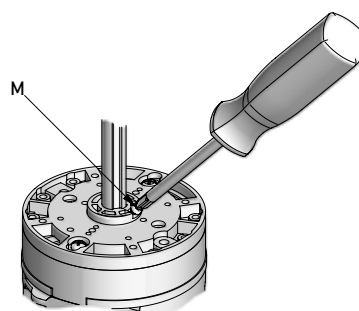

M	M̄	0,80 Nm		
---	----	---------	--	--

1. Loosen the screw
2. Move shaft
3. Tighten the screw

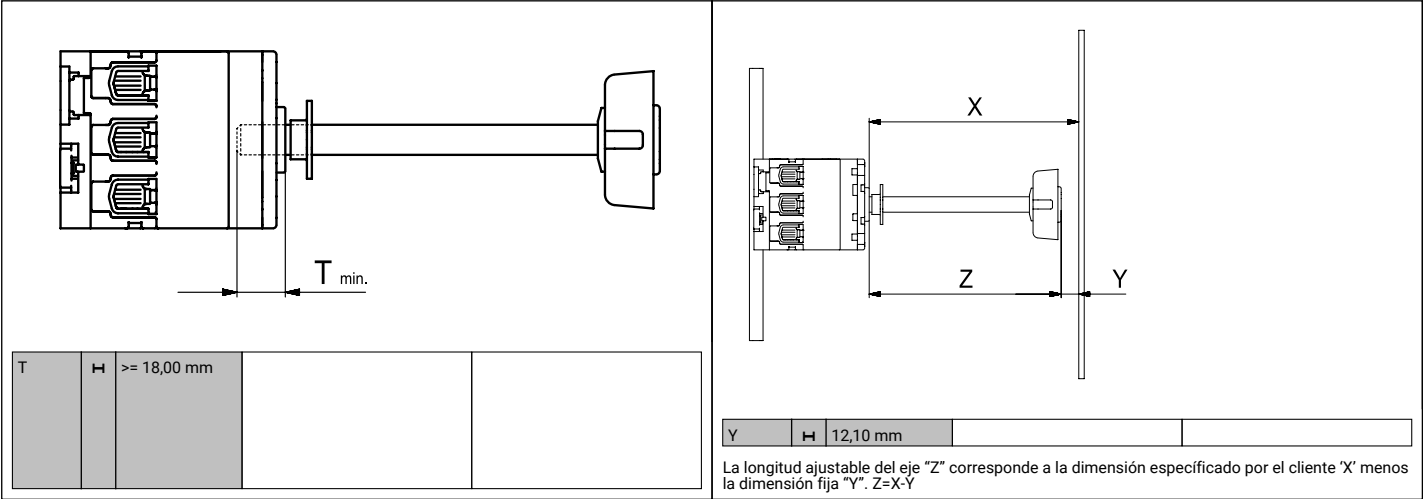



Sample image

AUXILIARY CONTACTS

for KG125-KG317 - ON/OFF Switches

Designation: K3A.M510B/11A-B

Number of NO-contacts: "1" total number of NO/NC-contacts max. 8 contacts

Number of NC-contacts: "1" total number of NC/NO-contacts max. 8 contacts

Version: "A" Standard (silver)

Type of mounting: "-B" for type of mounting VE

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Rated insulation voltage Ui				
		Voltage (V) AC / DC		
		690 50/60Hz		
Rated uninterrupted current Iu/Ith				
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
16	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C	
Rated operational current Ie				
Utilization category		Voltage (V)		Current (A)
AC-15		110 - 120		6
AC-15		220 - 240		5
AC-15		380 - 440		4
AC-15		500		1,50
AC-21A		20 - 690		16
Max. Fuse rating IEC				
Fuse characteristic		No. of Fuses		Current (A)
gG		1		16
UL60947-4-1 , UL508				
Nominal Voltage				
		Voltage (V) AC / DC		
		600 AC		
Rated insulation voltage Ui				
		Voltage (V) AC / DC		
		600 AC		
Rated thermal current				
		Current (A)	Ambient temperature (°C)	Additional Text
		10	0 - 40	–
Pilot duty rating code				
Duty Code				
A600				
Temp. rating of wire				
		Temperature rating (°C)	Current (A)	Text
		75	--	--
General Use				
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles
AC	600	10	1	1
		No. of contacts in series		
		1		
GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1	0.5mm²	Copper
Solid wire	Min.	2	0.5mm²	Copper
Flexible wire	Min.	1	0.75mm²	Copper
Flexible wire	Min.	2	0.75mm²	Copper
Flexible wire	Max.	2	2.5mm²	Copper
Flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper
Stripping length				
				Length (mm) –
				8
				
Recommended screw driver				
Type of screw driver		Value		
Slot screwdriver according to DIN 5264		0,8x4		

Recommended screw driver		
Type of screw driver	Value	
Cross Screwdriver	PH1	
Tightening torque of screws		
	tightening torque (Nm)	tightening torque (lb-in)
	0,60	5
General Information		
Text		
- Use solo alambres de cobre con o sin alambres individuales chapados en estaño/plata. No se permite el estañado posterior de los extremos del conductor. - Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated. - After wiring, ALL terminal screws must be tightened to the specified torque values. - Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.		
1321  1422		