



Sample image

Datasheet

Article number: 70003498

Designation: CA10.A401.PN1

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
690 AC / DC					
Rated impulse withstand voltage Uimp					
Voltage (kV) Overvoltage category		Pollution degree	Supply system		Function
4 III		3	Valid for lines with grounded common neutral termination		Switch disconnecter
Rated uninterrupted current Iu/Ith					
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements		
20	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C		
Rated operational current Ie					
Utilization category			Voltage (V)		Current (A)
AC-15			220 - 240		6
AC-15			380 - 440		4
Rated operational power					
Utilization category	Voltage (V)	No. of phases	No. of poles		Power (kW)
AC-3	220 - 240	3	3		3
AC-3	380 - 440	3	3		5,50
AC-3	660 - 690	3	3		5,50
AC-3	220 - 240	1	2		2,20
AC-3	380 - 440	1	2		3
AC-23A	220 - 240	3	3		3,70
AC-23A	380 - 440	3	3		7,50
AC-23A	660 - 690	3	3		7,50
AC-23A	220 - 240	1	2		2,50
AC-23A	380 - 440	1	2		3,70
Max. Fuse rating IEC					
Fuse characteristic			No. of Fuses		Current (A)
gG			1		25
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
300 AC / DC					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
300 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C)		Additional Text	
20		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,17	40
Reversing	220 - 240	1	2	0,50	40
Reversing	277 - 277	1	2	0,60	40
Reversing	110 - 120	3	3	0,50	40
Reversing	220 - 240	3	3	1	40
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
Pilot duty rating code					
Duty Code					
A300					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.					
Temp. rating of wire					
Temperature rating (°C)		Current (A) Text			
60 - 75		-- Use copper wire only			

Connecting instructions
Markings

When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	300	20	1	2	1
AC	300	20	3	3	1

CSA
Nominal Voltage

Voltage (V)	AC / DC
300	AC

Rated insulation voltage Ui

Voltage (V)	AC / DC
300	AC

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
20	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40

Pilot duty rating code
Duty Code

A300

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
75	--	only

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	300	20	1	1	1

GENERAL TECHNICAL INFORMATION
Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1	0.5mm²	Copper
Solid wire	Min.	2	0.5mm²	Copper
Flexible wire	Min.	1	0.75mm²	Copper
Flexible wire	Min.	2	0.75mm²	Copper
Flexible wire	Max.	2	2.5mm²	Copper
Flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper

Stripping length

Length (mm) --


Recommended screw driver
Type of screw driver

Cross Screwdriver

Slot screwdriver according to DIN 5264

Value

PH1

0,8x4

Tightening torque of screws

tightening torque (Nm)

0,60

tightening torque (lb-in)

5

Approbations
Specification

CE marking

UK Directives

Marking


General Information
Text

- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.
- DC switching capacity applies to ON/OFF switches.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Het gebruik van een extra apparaat kan de beschermingsklasse van de gekozen bouwvorm beïnvloeden.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-PN1

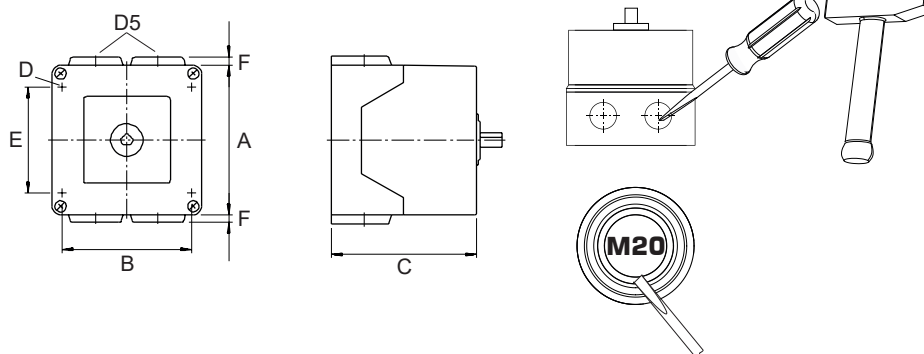


IP - Code front side	IP42
Stages	3,00 - 3,00
A	□ 64,00 mm
B	H 50,00 mm
C	H 55,30 mm
D	Ø 4,40 mm
D5	Ø 4,00 x M20
E	H 36,00 mm
F	H 4,00 mm



Wiring diagram


CA10.A401.PN1

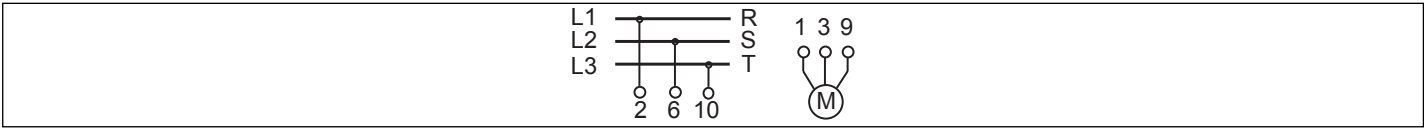

Page 5 of 7

Face plate


S0.F071/A10.PNL

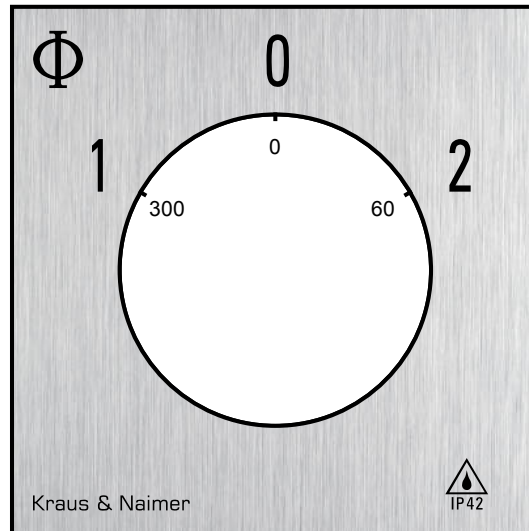



HANDLES

Designation: S0C.G257
Handle colour: "7" electro grey

GENERAL TECHNICAL INFORMATION					
Recommended screw driver					
Type of screw driver			Value		
Cross Screwdriver			PH1		
Slot screwdriver according to DIN 5264			0,8x4		
					
A	22,00 mm	B	23,80 mm	C	27,60 mm