



Sample image

Datasheet

Article number: 70009947

Designation: KG64.T103/40.KL11V

Description: Switch Global Disconnecter


IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			690 AC			
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
63	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category			Voltage (V)		Current (A)	
AC-32A			20 - 400		63	
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	11		
AC-3	380 - 440	3	3	18,50		
AC-3	660 - 690	3	3	15		
AC-23A	220 - 240	3	3	11		
AC-23A	380 - 440	3	3	22		
AC-23A	660 - 690	3	3	18,50		
Max. Fuse rating IEC						
Fuse characteristic			No. of Fuses		Current (A)	
gG			1		63	
UL60947-4-1, UL508						
Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			600 AC			
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		60	0 - 40		-	
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	3	40
DOL		220 - 240	1	2	7,50	40
DOL		277 - 277	1	2	7,50	40
DOL		415 - 415	1	2	10	40
DOL		440 - 480	1	2	15	40
DOL		550 - 600	1	2	15	40
DOL		110 - 120	3	3	5	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	20	40
DOL		440 - 480	3	3	30	40
DOL		550 - 600	3	3	40	40
SCCR / Max. fuse rating						
<i>Conditions of acceptability</i>						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 70A Class J fuses.						
Temp. rating of wire						
			Temperature rating (°C)		Current (A) Text	
			60 - 75		-- --	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
General Information						
<i>Text</i>						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						

General Information						
<i>Text</i>						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
					Voltage (V) AC / DC	
					600 AC	
Rated insulation voltage Ui						
					Voltage (V) AC / DC	
					600 AC	
Rated thermal current						
			Current (A)	Ambient temperature (°C)		Additional Text
			60	0 - 40		-
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	3	40
DOL		220 - 240	1	2	7,50	40
DOL		277 - 277	1	2	7,50	40
DOL		415 - 415	1	2	10	40
DOL		440 - 480	1	2	15	40
DOL		110 - 120	3	3	5	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	20	40
DOL		440 - 480	3	3	30	40
DOL		550 - 600	3	3	40	40
Temp. rating of wire						
			Temperature rating (°C)	Current (A)		Text
			75	--		--
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)		Material of the wire	
Solid wire	Min.		2	0.75mm ²	Copper	
Solid wire	Min.		1	1.5mm ²	Copper	
Flexible wire	Max.		1	AWG 6	Copper	
Flexible wire	Min.		1	2.5mm ²	Copper	
Flexible wire	Max.		1	10mm ²	Copper	
Flexible wire	Min.		2	1.5mm ²	Copper	
Single-core or stranded wire	Max.		1	AWG 6	Copper	
Single-core or stranded wire	Max.		1	16mm ²	Copper	
Flexible wire with sleeve	Max.		1	10mm ²	Copper	
Flexible wire with ferrule according to DIN 46228	Min.		2	0.75mm ²	Copper	
Flexible wire with ferrule according to DIN 46228	Min.		1	1.5mm ²	Copper	
Stripping length						
			Length (mm) --			
						
Recommended screw driver						
			Type of screw driver			
			Value			
			Cross Screwdriver			
			PH2			
			Slot screwdriver according to DIN 5264			
			1,2x6,5			
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1,80		16	
Approbations						
Specification					Marking	
CE marking						
UK Directives						
CSA C.22.2 No.14						
General Information						
<i>Text</i>						
- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.						
- EMC Note: This device is suitable for use in environment A and B.						
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.						
- After wiring, ALL terminal screws must be tightened to the specified torque values.						
- Het gebruik van een extra apparaat kan de beschermingsklasse van de gekozen bouwvorm beïnvloeden.						


General Information

Text
 - Do not lubricate or treat contacts.
 - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Waste Electrical & Electronic Equipment (WEEE)


Picture name Description
 Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description
 WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge
 Classification Contact Mat: Silver
 Classification Terminal: Screw terminal


Mounting-KL11V

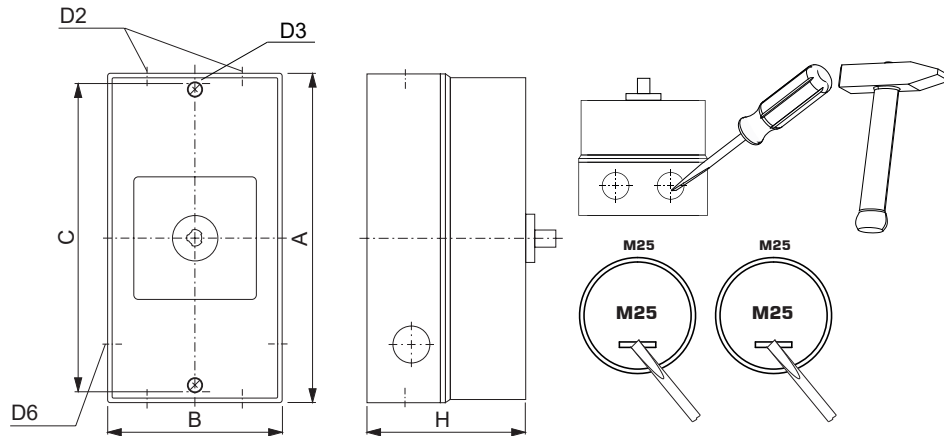

IP - Code front side	IP66, IP67, IP69k
Stages	1,00 - 5,00
A	H 190,00 mm
B	H 100,00 mm
C	H 178,00 mm
D2	Ø 4,00 x M25
D3	Ø 5,60 mm
D6	Ø 2,00 x M25
H	H 93,00 mm


Wiring diagram

KG64.T303.KL11V

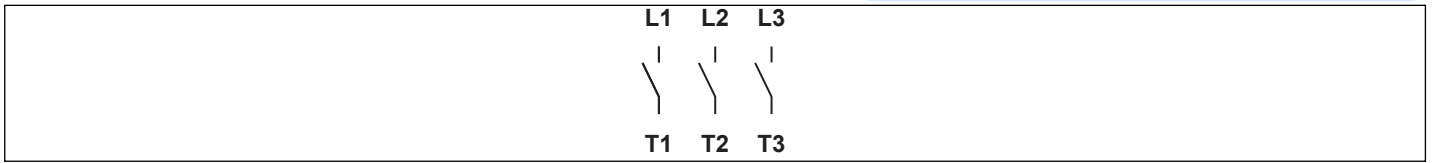

Face plate

S1.F656/C10.V9

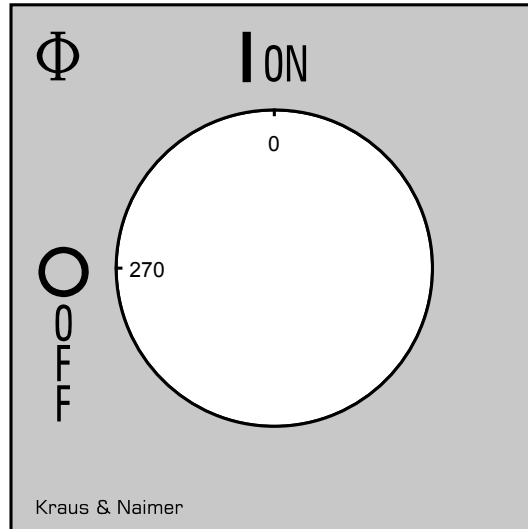

HANDLES

Designation: S1B.G841
Handle colour: "1" black

GENERAL TECHNICAL INFORMATION

Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x5,5

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B


Designation: K1.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts


Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Nominal Voltage						
			Voltage (V) AC / DC			
			690 AC			
Rated uninterrupted current I_u/I_{th}						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
16	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Rated operational current I_e						
Utilization category				Voltage (V)	Current (A)	
AC-15				110 - 240	6	
AC-15				380 - 440	3	
AC-15				500	1,50	
AC-21A				20 - 690	16	
UL60947-4-1 , UL508						
Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Rated insulation voltage U_i						
			Voltage (V) AC / DC			
			600 AC			
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		10	0 - 40		--	
Pilot duty rating code						
Duty Code						
A600						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	10	1	1	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)		Material of the wire	
Solid wire	Min.	1	0.5mm ²		Copper	
Solid wire	Min.	2	0.5mm ²		Copper	
Flexible wire	Min.	1	0.75mm ²		Copper	
Flexible wire	Min.	2	0.75mm ²		Copper	
Flexible wire	Max.	2	2.5mm ²		Copper	
Flexible wire	Max.	2	AWG 14		Copper	
Single-core or stranded wire	Max.	2	AWG 12		Copper	
Single-core or stranded wire	Max.	2	2.5mm ²		Copper	
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm ²		Copper	
Flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm ²		Copper	
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm ²		Copper	
Stripping length						
			Length (mm) --			
						
Recommended screw driver						
Type of screw driver			Value			
Cross Screwdriver			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			0,60		5	

Conditions during transport and storing		
Minimum temperature (°C)	Maximum temperature (°C)	additional requirements
-40	85	In case of temperatures below -5°C no shock load permissible
General Information		
<i>Text</i>		
<ul style="list-style-type: none"> - Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan. - Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated. - After wiring, ALL terminal screws must be tightened to the specified torque values. - Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. 		

Classification Terminal: Screw terminal
 <p>13 21 14 22</p>