



Sample image

Datasheet

Article number: 70021928

Designation: KG32.T103/40.KL51V

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Rated insulation voltage Ui				
Voltage (V) AC / DC				
690 AC				
Rated uninterrupted current Iu/Ith				
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
32	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C	
Rated operational current Ie				
Utilization category		Voltage (V)		Current (A)
AC-32A		20 - 400		32
Rated operational power				
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3	220 - 240	3	3	5,50
AC-3	380 - 440	3	3	7,50
AC-3	660 - 690	3	3	7,50
AC-23A	220 - 240	3	3	5,50
AC-23A	380 - 440	3	3	11
AC-23A	660 - 690	3	3	11
Max. Fuse rating IEC				
Fuse characteristic		No. of Fuses		Current (A)
gG		1		35
UL60947-4-1 , UL508				
Nominal Voltage				
Voltage (V) AC / DC				
600 AC				
Rated insulation voltage Ui				
Voltage (V) AC / DC				
600 AC				
Rated thermal current				
Current (A)		Ambient temperature (°C) Additional Text		
30		0 - 40 --		
Horsepower rating				
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL	110 - 120	1	2	1,50
DOL	200 - 208	1	2	3
DOL	220 - 240	1	2	5
DOL	277 - 277	1	2	5
DOL	415 - 415	1	2	5
DOL	440 - 480	1	2	7,50
DOL	550 - 600	1	2	7,50
DOL	110 - 120	3	3	3
DOL	200 - 240	3	3	10
DOL	415 - 415	3	3	10
DOL	440 - 480	3	3	20
DOL	550 - 600	3	3	25
Pilot duty rating code				
Duty Code				
A600				
SCCR / Max. fuse rating				
Conditions of acceptability				
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.				
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.				
Temp. rating of wire				
Temperature rating (°C)		Current (A) Text		
60 - 75		-- --		
General Use				
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles
AC	277	30	1	1
AC	600	30	1	2
AC	600	30	3	3
No. of contacts in series				
1				
1				

General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			600 AC			
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		30	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL			110 - 120	1	2	1,50
DOL			220 - 240	1	2	5
DOL			277 - 277	1	2	5
DOL			415 - 415	1	2	5
DOL			440 - 480	1	2	7,50
DOL			550 - 600	1	2	7,50
DOL			110 - 120	3	3	3
DOL			220 - 240	3	3	10
DOL			415 - 415	3	3	10
DOL			440 - 480	3	3	20
DOL			550 - 600	3	3	25
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
		Temperature rating (°C)	Current (A)		Text	
		75	--		--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	30	1	1	1	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value		No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire
Solid wire	Min.		1	0.75mm²		Copper
Solid wire	Min.		2	0.5mm²		Copper
Flexible wire	Min.		2	0.75mm²		Copper
Flexible wire	Max.		1	AWG 10		Copper
Flexible wire	Max.		1	4mm²		Copper
Flexible wire	Min.		1	1.5mm²		Copper
Single-core or stranded wire	Max.		1	6mm²		Copper
Single-core or stranded wire	Max.		1	AWG 10		Copper
Flexible wire with sleeve	Max.		1	4mm²		Copper
Flexible wire with ferrule according to DIN 46228	Min.		1	0.75mm²		Copper
Flexible wire with ferrule according to DIN 46228	Min.		2	0.5mm²		Copper
Stripping length						
			Length (mm) --			
						
Recommended screw driver						
Type of screw driver			Value			
Cross Screwdriver			PH2			
Slot screwdriver according to DIN 5264			0,8x4			
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1,25		11	
Approbations						
Specification					Marking	
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						

General Information

Text

- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.
- EMC Note: This device is suitable for use in environment A and B.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Het gebruik van een extra apparaat kan de beschermingsklasse van de gekozen bouwvorm beïnvloeden.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-KL51V

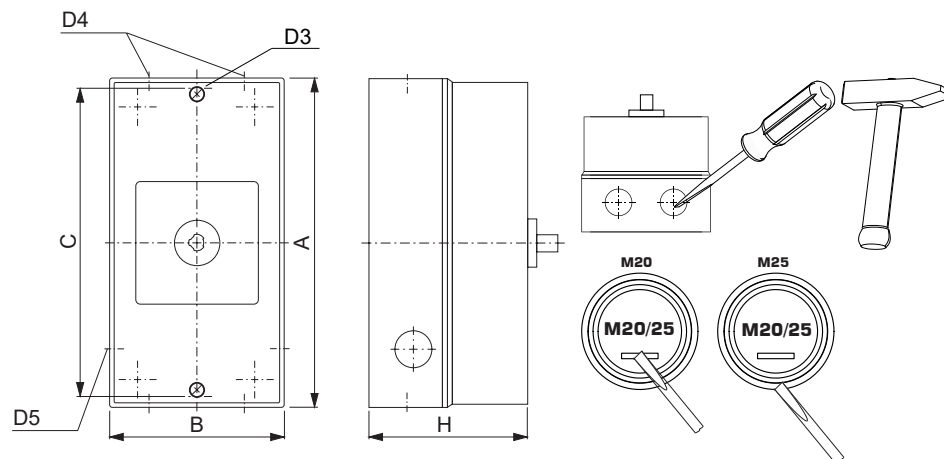


IP - Code front side	IP66, IP67, IP69k
Stages	1,00 - 5,00
A	H 160,00 mm
B	H 85,00 mm
C	H 150,00 mm
D3	Ø 4,20 mm
D4	Ø 4,00 x M20/M25
D5	Ø 2,00 x M20
H	H 82,00 mm



Wiring diagram

KG32.T303.KL51V

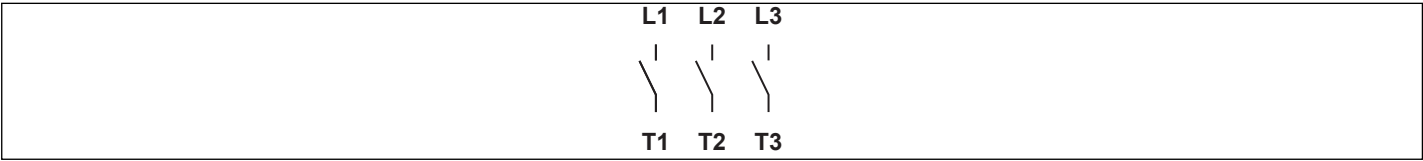


Switch program

KG32.T303.KL51V



Kraus & Naimer


KG32
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0								
	90								
	180								

Version: 102

Face plate

S1.F656/C10.V9

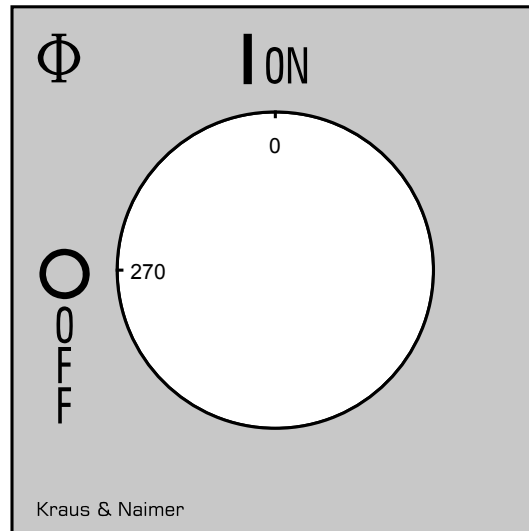

HANDLES

Designation: S1B.G841
Handle colour: "1" black

GENERAL TECHNICAL INFORMATION	
Recommended screw driver	
Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x5,5

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K0.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage

Voltage (V) AC / DC
440 AC

Rated uninterrupted current Iu/Ith

Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements
10	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C

Rated operational current Ie

Utilization category	Voltage (V)	Current (A)
AC-15	110 - 240	2,50
AC-15	380 - 440	1,50
AC-21A	440	10

UL60947-4-1, UL508

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
10	0 - 40	-

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1	0.5mm²	Copper
Solid wire	Min.	2	0.5mm²	Copper
Flexible wire	Min.	1	0.75mm²	Copper
Flexible wire	Min.	2	0.75mm²	Copper
Flexible wire	Max.	2	AWG 16	Copper
Flexible wire	Max.	2	1.5mm²	Copper
Single-core or stranded wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	1.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	1mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper

Stripping length

Length (mm) --



Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,6x3,5

Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
0,40	3,50

Conditions during transport and storing

Minimum temperature (°C)	Maximum temperature (°C)	additional requirements
-40	85	In case of temperatures below -5°C no shock load permissible

General Information

Text
- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Classification Terminal: Screw terminal

13	21
	
14	22