



Sample image

## Datasheet

**Article number:** 70025926  
**Designation:** CA63.A293.EF  
**Description:** Switch

<b>IEC 60947-3 EN 60947-3, VDE 0660 Teil 107</b>						
<b>Rated insulation voltage Ui</b>						
Voltage (V) AC / DC						
690 AC						
<b>Rated uninterrupted current Iu/Ith</b>						
Current (A)	Ambient temperature (°C)	Peak temperature (°C) additional requirements				
63	55	60 Ambient temperature +55°C during 24 hours with peaks up to +60°C				
<b>Rated operational current Ie</b>						
Utilization category						
				Voltage (V)	Current (A)	
AC-15				220 - 240	16	
AC-15				380 - 440	7	
<b>Rated operational power</b>						
Utilization category		Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3		220 - 240	3	3	11	
AC-3		380 - 440	3	3	18,50	
AC-3		660 - 690	3	3	22	
AC-3		220 - 240	1	2	6	
AC-3		380 - 440	1	2	11	
AC-23A		220 - 240	3	3	15	
AC-23A		380 - 440	3	3	30	
AC-23A		660 - 690	3	3	30	
AC-23A		220 - 240	1	2	10	
AC-23A		380 - 440	1	2	18,50	
<b>Max. Fuse rating IEC</b>						
Fuse characteristic						
gG				No. of Fuses	Current (A)	
				1	63	
<b>UL60947-4-1 , UL508</b>						
<b>Nominal Voltage</b>						
Voltage (V) AC / DC						
600 AC						
<b>Rated insulation voltage Ui</b>						
Voltage (V) AC / DC						
600 AC						
<b>Rated thermal current</b>						
Current (A)		Ambient temperature (°C)		Additional Text		
60		0 - 40		--		
<b>Horsepower rating</b>						
Across-the-Line Motor Starting						
		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	3	40
DOL		220 - 240	1	2	7,50	40
DOL		277 - 277	1	2	10	40
DOL		415 - 415	1	2	10	40
DOL		440 - 480	1	2	15	40
DOL		550 - 600	1	2	20	40
DOL		110 - 120	3	3	7,50	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	20	40
DOL		440 - 480	3	3	30	40
DOL		550 - 600	3	3	30	40
<b>Pilot duty rating code</b>						
Duty Code						
A600						
<b>SCCR / Max. fuse rating</b>						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class J fuses.						
<b>Temp. rating of wire</b>						
Temperature rating (°C)			Current (A) Text			
75			-- Use copper wire only			
<b>Connecting instructions</b>						
Markings						
Break all lines.						

## Connecting instructions

### Markings

For use on a flat surface of a type 1 enclosure.

When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

### General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	60	1	2	1
AC	600	60	3	3	1

## GENERAL TECHNICAL INFORMATION

### Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm <sup>2</sup> ) or (AWG/kcmil)	Material of the wire
Solid wire	Min.		2 0.75mm <sup>2</sup>	Copper
Solid wire	Min.		1 1.5mm <sup>2</sup>	Copper
Flexible wire	Max.		1 AWG 6	Copper
Flexible wire	Min.		1 2.5mm <sup>2</sup>	Copper
Flexible wire	Max.		1 10mm <sup>2</sup>	Copper
Flexible wire	Min.		2 1.5mm <sup>2</sup>	Copper
Single-core or stranded wire	Max.		1 AWG 6	Copper
Single-core or stranded wire	Max.		1 16mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.		2 0.75mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Max.		1 10mm <sup>2</sup>	Copper
Flexible wire with ferrule according to DIN 46228	Min.		1 1.5mm <sup>2</sup>	Copper

### Stripping length

Length (mm) --



### Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH2
Slot screwdriver according to DIN 5264	1x5,5

### Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
1,80	16

### Approbations

#### Specification

CE marking

Marking



UK Directives




### General Information


#### Text

- Alleen koperleidingen met of zonder vertinde/verzilverde draden (per draad) gebruiken. Het nadien vertinnen van de uiteinden is niet toegestaan.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- Het gebruik van een extra apparaat kan de beschermingsklasse van de gekozen bouwvorm beïnvloeden.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

### Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at <a href="http://www.krausnaimer.com">www.krausnaimer.com</a>

### Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-EF

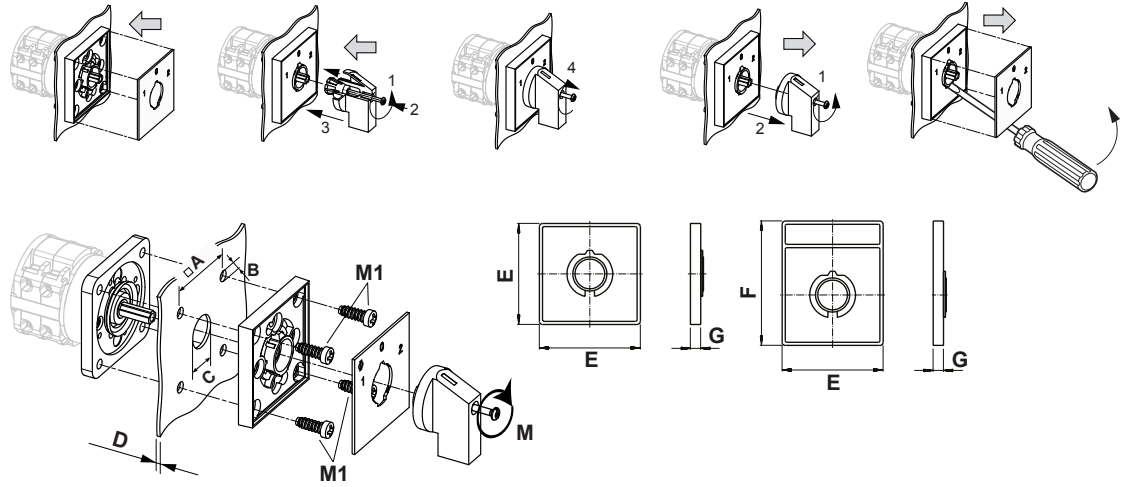

IP - Code front side	IP66, IP67, IP69k
Stages	1,00 - 12,00
A	□ 48,00 mm
B	∅ 5,00 mm
C	∅ 19,00 - 22,00 mm
D	H ≤ 4,00 mm
E	H 64,00 mm
F	H 78,00 mm
G	H 7,40 mm
M	↺ 0,70 Nm
M1	↺ 0,90 Nm

## Wiring diagram


CA63.A293.EF

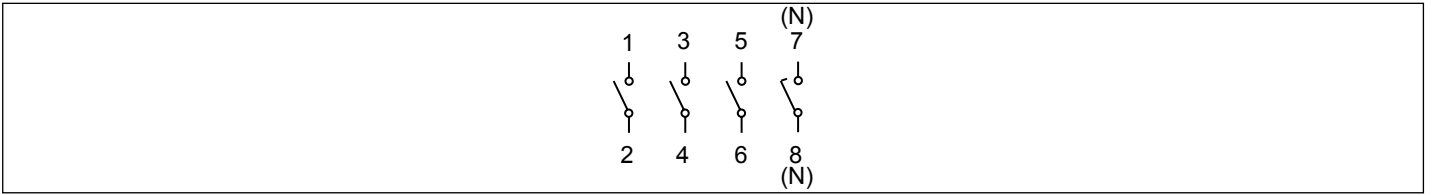



**Face plate**

S1.F056/A1B.PEL

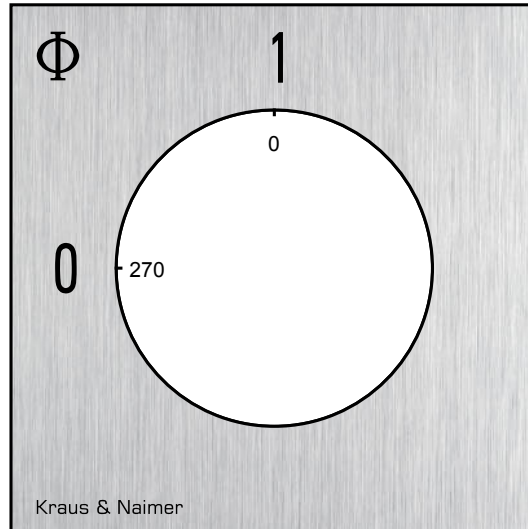


## HANDLES

**Designation:** S1B.G251  
**Handle colour:** "1" black

### GENERAL TECHNICAL INFORMATION

#### Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x5,5



A	27,00 mm	B	31,80 mm	C	36,00 mm
---	----------	---	----------	---	----------